



PRODUCT UPDATE


Ducted Controller Touch Pad

Take control of your customer's home climate with Fujitsu's anywAiR® technology Ducted Controller – the smart solution for managing a new ducted air conditioning system.

Users enjoy seamless Wi-Fi connectivity and intuitive control via a sleek wall-mounted touchpad, or adjust settings anytime, anywhere using the anywAiR® app¹.

And now you can enhance your customers' smart home experience even further with the all-new Garage Door Controller and Sensor⁴ add-on for Fujitsu's anywAiR technology ducted controller. Whether at work or on the go, customers will have peace of mind knowing they can check and control their garage door right from their smartphone.

NEW!
Garage Door Controller⁴
Feature

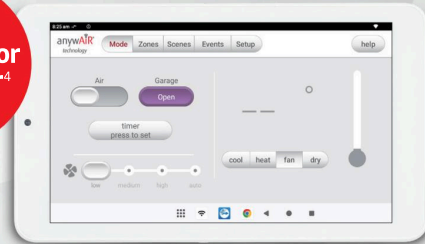

UTY-ANY2

Key features of the ducted controller:

Easy to Use Touchpad

Mounted portrait or landscape to the wall, the anywAiR technology ducted controller is simple to set-up using a Google Play Store account. The touchpad can be used to operate the ducted system and manage a variety of Android apps.

Programmable scenarios

Create up to 12 custom scenes to run a series of commands at the touch of a button or at a chosen time.

Variable Air Volume (VAV)² & Temperature Controlled³ (VAV)

Variable Air Volume enables the user to select the percentage of air flow for each zone. Temperature Controlled VAV is available if optional temperature sensors are installed in each zone, allowing the user to choose the desired temperature for each zone and the system will adjust the airflow required.

Sleep Economiser

Save energy by the unit automatically switching from COOL to FAN overnight (10pm – 6am) before returning to COOL in the morning.

Active Weather

Receive real-time temperature updates for the user's suburb. Create and manage events that trigger cooling, heating or fan operation based on local temperature thresholds, with optional alert notifications.

Garage Door (optional add-on) key features:



Remote Control

Operate the garage door from anywhere through the anywAiR app on a smart device.

Compatibility

Designed for panel doors with a flat surface, ensuring accurate status detection (open, moving, or shut).

Automatic Notifications

Receive alerts on connected devices if the garage door is left open for a specified duration.

Power Supply

Powered directly from the garage door motor if it has a DC output or a 12-24VDC power supply. Garage Door Sensor operates on a 3V CR2450 battery.

(1) The anywAiR® app is only compatible with a selected range of Fujitsu General ducted air conditioners when the optional anywAiR® technology ducted controller is installed. It is not a standard inclusion when purchasing a Fujitsu ducted air conditioning system and must be installed by a Fujitsu Authorised Partner.

(2) VAV control is achieved by adjusting the opposed blade damper to control the airflow. The airflow fan setting (high/med/low/auto) of the system works independently to this function.

(3) Requires optional individual room sensors to be installed.

(4) Fujitsu's Garage Door Controller and Garage Door Sensor is an add-on that is compatible with the UTY-ANY2 anywAiR technology Ducted Controller and must be installed by a Fujitsu installer. Applicable for panel garage doors only. App version 2.1478 or later. Copyright© 2025 Fujitsu General Australia. All rights reserved. Actual products' colours may be different from the colours shown online. App Store is a service mark of Apple Inc. ©2019 Google LLC All rights reserved. Google Play and the Google Play logo are trademarks of Google LLC. Other trademarks and tradenames are acknowledged to be the copyright of their respective holders.

FUJITSU GENERAL AUSTRALIA