

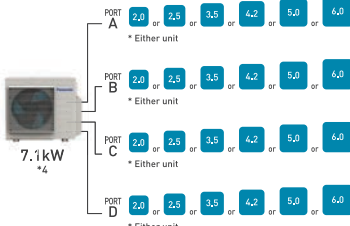


INDOOR & OUTDOOR COMBINATION TABLE

MODEL	Indoor Units Combination Range	Refrigerant Pipe Diameter			Pipe Extension					Indoor Unit Combinations				
		Indoor Unit	Liquid Side (mm)	Gas Side (mm)	Maximum Pipe Length (1 room)	Maximum Pipe Length (Total)	Maximum Chargeless Length	Additional Gas	Maximum Height	Type Capacity [kW class]	Wall-Mounted	Cassette	Ultra Slim Ducted	Floor Console
Up to 2 rooms CU-2Z52VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  Dimensions (HxWxD): 619 x 824(+70) x 299 mm Weight: 39 kg * At least two indoor units must be connected.	3.2 to 7.7 kW	Room A	ø 6.35	ø 9.52	20 m	30 m	20 m	15 g/m	10 m	2.0	•			
										2.5	•	•	•	•
										3.5	•	•	•	•
		Room B	ø 6.35	ø 9.52						4.2	•			
										5.0	•	•	•	•
Up to 3 rooms CU-3Z54VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  Dimensions (HxWxD): 795 x 875(+95) x 320 mm Weight: 71 kg * At least two indoor units must be connected.	4.5 to 9.5 kW	Room A	ø 6.35	ø 9.52	25 m	50 m	30 m	20 g/m	15 m	2.0	•			
										2.5	•	•	•	
		Room B	ø 6.35	ø 9.52						3.5	•	•	•	
										4.2	•			
		Room C	ø 6.35	ø 9.52						5.0	•	•	•	
Up to 4 rooms CU-4Z71VBR INDOOR UNITS: Possible Combination Patterns Must be within capacity range  Dimensions (HxWxD): 795 x 875(+95) x 320 mm Weight: 72 kg * At least two indoor units must be connected.	4.5 to 11.5 kW	Room A	ø 6.35	ø 9.52	25 m	60 m	30 m	20 g/m	15 m	2.0	•			
										2.5	•	•	•	
		Room B	ø 6.35	ø 9.52						3.5	•	•	•	
										4.2	•			
		Room C	ø 6.35	ø 9.52						5.0	•	•	•	
										6.0	•	•	•	
		Room D	ø 6.35	ø 9.52										

*4 To enable demand response management, an optional accessory needs to be installed [CZ-CAP2]

OUTDOOR UNIT

Up to 2 rooms

Up to 3 rooms

Up to 4 rooms

BLUE FIN
CONDENSER

R32
REFRIGERANT



CU-2Z52VBR



CU-3Z54VBR



CU-4Z71VBR

INDOOR & OUTDOOR COMBINATION TABLE

MODEL		Indoor Units Combination Range	Refrigerant Pipe Diameter			Pipe Extension					Indoor Unit Combinations				
			Indoor Unit	Liquid Side (mm)	Gas Side (mm)	Maximum Pipe Length (1 room)	Maximum Pipe Length (Total)	Maximum Chargeless Length	Additional Gas	Maximum Height	Type Capacity [kW class]	Wall- Mounted	Cassette	Ultra Slim Ducted	Floor Console
Up to 4 rooms	CU-4Z80VBR	4.5 to 14.7 kW	Room A	ø 6.35	ø 9.52	25 m	70 m	45 m	20 g/m	15 m	2.0	•			
	Room B		ø 6.35	ø 9.52	2.5						•	•	•		
	Room C		ø 6.35	ø 9.52	3.5						•	•	•		
	Room D		ø 6.35	ø 9.52	4.2						•				
					5.0						•	•	•		
					6.0						•	•	•		
	7.1		•												
Up to 5 rooms	CU-5Z100VBR	4.5 to 18.3 kW	Room A	ø 6.35	ø 9.52	25 m	80 m	45 m	20 g/m	15 m	2.0	•			
	Room B		ø 6.35	ø 9.52	2.5						•	•	•		
	Room C		ø 6.35	ø 9.52	3.5						•	•	•		
	Room D		ø 6.35	ø 9.52	4.2						•				
					5.0						•	•	•		
					6.0						•	•	•		
	Room E		ø 6.35	ø 9.52	7.1						•				

*4 To enable demand response management, an optional accessory needs to be installed (CZ-CAP2)

ACCESSORIES



CZ-MA1PA

*1 CZ-MA1PA is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".



CZ-MA2PA

*2 CZ-MA2PA is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".



CZ-MA3PA

*3 CZ-MA3PA is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".



CZ-CAP2

*4 Demand response module CZ-CAP2.

OUTDOOR UNIT

Up to 4 rooms



CU-4Z80VBR

Up to 5 rooms



CU-5Z100VBR

BLUE FIN
CONDENSER

R32
REFRIGERANT